

Specifications

| F | requency Range(MHz) | VHF: 136-174MHz |
|------|--|---|
| С | Channel Capacity | 1024 |
| Z | one Capacity | 64 |
| С | Channel Spacing | 25/20/12.5KHz |
| 0 | Operating Voltage | 7.4V (rated) |
| В | Battery | 1800mAh (Li-lon) |
|) (5 | Sattery Life 5-5-90 Duty Cycle, High TX Power) | Analog: over 10 Hours (1800mAh Li-ion battery) Digital: over 14 Hours (1800mAh Li-ion battery) |
| F | requency Stability | ± 1.5ppm |
| А | Antenna Impedance | 50 Ω |
| (\ | Dimensions (H×W×D) with standard battery, vithout antenna) | 119.5 X 57 X 21mm (1100mAh Li-ion battery) 119.5 X 57 X 26mm (1800mAh Li-ion battery) |
| V | Veight | about 240g (1100mAh Li-ion battery) about 280g (1800mAh Li-ion battery) |
| L | CD Display | 160 x 128 pixels, 65536 colors 1.8 inch, 4 rows |

| | Sensitivity | Analog | 0.3µV (12dB SINAD) 0.22µV (Typical) (12dB SINAD) 0.4µV (20dB SINAD) |
|----------|------------------------------------|----------------|---|
| | | Digital | 0.3 μV /BER5% |
| Receiver | Selectivity TIA-603 ETSI | | 60dB @ 12.5KHz / 70dB @ 20&25KHz 60dB @ 12.5KHz / 70dB @ 20&25KHz |
| | Intermodulation TIA-603 ETSI | | 70dB @ 12.5/20/25KHz 65dB @ 12.5/20/25KHz |
| | Spurious Respo TIA-603 ETSI | onse Rejection | 70dB @ 12.5/20/25KHz 70dB @ 12.5/20/25KHz |
| | S/N | | 40dB @ 12.5KHz 43dB @ 20KHz; 45dB @ 25KHz |
| | Rated Audio Di | stortion | ≤3% |
| | Audio Response | | +1 ~ -3dB |
| | Conducted Spurious Emission | | < -57dBm |

All specifications are subject to change without notice due to continuous development.

FC (E

Nanshan District, Shenzhen, China

Address: HYT Tower, Hi-Tech Industrial Park North, Beihuan Rd.,

Tel: +86-755-2697 2999 Fax: +86-755-8613 7139 Post: 518057

Http://www.hytera.com/Stock/Code:002583.SZ


Hytera Communications Corporation Limited

| | RF Power Output | VHF High Power: 5W VHF Low Power: 1W UHF1/UHF3 High Power: 4W UHF1/UHF3 Low Power: 1W |
|-------------|-----------------------------|--|
| - | FM Modulation | 11K0F3E @ 12.5KHz 14K0F3E @ 20KHz 16K0F3E @ 25KHz |
| | 4FSK Digital Modulation | 12.5KHz Data Only: 7K60FXD 12.5KHz Data & Voice: 7K60FXW |
| | Conducted/Radiated Emission | -36dBm<1GHz -30dBm>1GHz |
| Transmitter | Modulation Limiting | ± 2.5KHz @ 12.5KHz ± 4.0KHz @ 20KHz ± 5.0KHz @ 25KHz |
| | FM Hum & Noise | 40dB @ 12.5KHz 43dB @ 20KHz 45dB @ 25KHz |
| | Adjacent Channel Power | 60dB @ 12.5KHz; 70dB @ 20/25KHz |
| | Audio Response | +1 ~ -3dB |
| | Audio Distortion | ≤3% |
| | Digital Vocoder Type | AMBE++ or SELP |
| | Digital Protocol | ETSI-TS102 361-1, 2&3 |

| Operating Temperature | -30℃ ~ +60℃ |
|----------------------------|--|
| Storage Temperature | -40℃ ~ +85℃ |
| ESD | IEC 61000-4-2 (level 4) ± 8kV (contact) ± 15kV (air) |
| American Military Standard | MIL-STD-810 C/D/E/F/G |
| Dust & Water Intrusion | IP67 Standard |
| Humidity | Per MIL-STD-810 C/D/E/F/G Standard |
| Shock & Vibration | Per MIL-STD-810 C/D/E/F/G Standard |
| | Storage Temperature ESD American Military Standard Dust & Water Intrusion Humidity |

| | TTFF(Time To First Fix) Cold Start | <1 minute |
|-----|------------------------------------|-------------|
| GPS | TTFF(Time To First Fix) Hot Start | <10 seconds |
| Ŭ, | Horizontal Accuracy | <10 metres |







Hytera X1p, ultra-thin full power keypad digital portable radio, complies fully with ETSI open standard. Perfect combination of structural rigidity, versatile functionalities, and refined design; secure communication ensured by AES encryption algorithm & 256 digit dynamic encryption keys; convenient application development facilitated by built-in Bluetooth and USB port; and worry-free handling achieved by IP67 protection.

All comes with a surprisingly small size: 21mm (1100mAh Li-ion battery) thin.







#77. Hytera are registered trademarks of Hytera Co., Ltd. © 2012 Hytera Co., Ltd. All Rights Reserved.

by printing materials will occur by printing reason.

www.hytera.com

Innovative Design

Ease of use

Easy to use with the rugged body as thin as 21mm, professional wireless headsets or collar microphone*, palm controller and flexible antenna.

IP67 compliance
 Complies with IP67 requirements, withstanding up to

1m submersion for 30 minutes or more.

Rugged & reliable
 Complies with MIL-STD-810 C/D/E/F/G standards and passes HALT (Highly Accelerated LifeTest).

Large-size colour display
 X1p adopts a 1.8" TFT LCD display (65536 colours),
 allowing good visibility even under outdoor strong sunlight.



Features

secure communication.

Advanced encryption
AES encryption algorithm & 256 digit dynamic encryption keys ensure

Supports Hytera Bluetooth earpieces*
The radio supports Hytera Bluetooth earpieces, facilitating operations.

Open USB interface
Open USB port facilitates secondary and application development.

GPS positioning
The built-in GPS module supports GIS applications.

Dual mode (analog & digital)

Dual modes (analog & digital) operation ensures a smooth analog-todigital migration.

Versatile voice calls

Versatile voice calls include individual call, group call and all-call.

Vibration
Vibration alerts the reception of voice call and message.

Rich signaling
Supports multiple advanced analog signaling, including HDC1200, DTMF, 2Tone* and 5-Tone, providing more expansion capacity.

Software upgradable
Upgradable software enables new features without buying a new radio.

*Available in future release.

Work with *SmartDispatch* dispatcher system and Portable repeater to achieve flexible networking & dispatching

For mission critical users like special police, anti-drug/anti-smuggling officer, senior guard, etc., only a convert terminal is not enough to accomplish tasks and ensure safety. This is where a complete communications solution is demanded.

SmartDispatch

A digital dispatching system developed on the Hytera digital platform in compliance to ETSI DMR open standard, is designed for efficient communication, management and dispatching of professional users.

SmartDispatch supports all types of calls that meet your various dispatching operational needs, include private call, group call, all call. Every SmartDispatch dispatcher client console is able to dispatch up to 8 voice dispatching channels. Through these dispatching channels, SmartDispatch could receive all types of calls as well as trigger any type of call through user friendly and easy to operate user interface.

All types of voice calls

 Voice recording & playback
 All incoming calls and outgoing calls will be recorded in SmartDispatch server. This includes all types of DMR voice calls and PSTN interconnected calls. Users can retrieve recorded voice and playing back at any time. All recorded voices are easily can be searched through time, caller ID or callee ID.


Radio kill & radio revive

SmartDispatch is able to kill a radio unit remotely when the radio unit is under illegal usage or being stolen. The killed radio is able to power on but not able to perform transmitting or receiving. SmartDispatch is also able to activate a killed radio when necessary.

Real-time tracking
 This feature allows SmartDispatch to track the location of any radio units in real-time. Users have an option to display the location route on the mapping. On critical missions, the dispatcher can send staff nearby for check and help when the route of a patroller halted.

Portable repeater for flexible networking

Take the portable repeater to extend the coverage area, allow flexible networking and high mobility in tasks, which is especially helpful in tracking, body guarding and mobile dispatching.

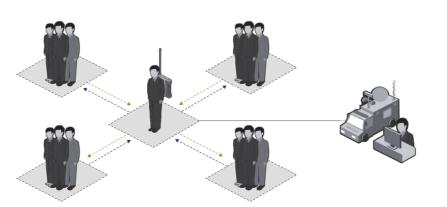

Learn more about SmartDispatch and the backpack repeater, please visit www.hytera.com or contact our local dealers and sales representatives.



Portable repeater

Versatile accessories for specific tasks



Accessories

| Li-ion Battery 1100mAh |
|--|
| Li-ion Battery 1800mAh |
| Switching Power(US-standard) 12V 1A |
| MCU Dual Charger |
| 3-wire Surveillance Earpiece with |
| Transparent Acoustic Tube (Beige) Remote C-Earset |
| Remote Swivel Earset |
| Remote Earbud |
| Vest |
| Antenna |

High-capacity Battery & Belt Charger:
For users require long-time operation, a high-capacity battery with belt charger is undoubtedly the best match. The 1800mAh Li-ion battery of X1p enables it to work for up to 15 hours, and the belt charger further extends its operation time with convenient charging.

BL1809

CH04L01

Li-ion Battery 1800mAh Belt Charger

BL1103

BL1809

PS1014

EAN21

EHN21

EHN2O

ESN14 NCN009

CH10L15

Both wireless earphone and, Bluetooth earpiece are available for X1p.

Wireless Earphone EWN08

Audio Accessories

Bluetooth earpiece

h earpiece EHW02

Hytera X1p